

FIG.2

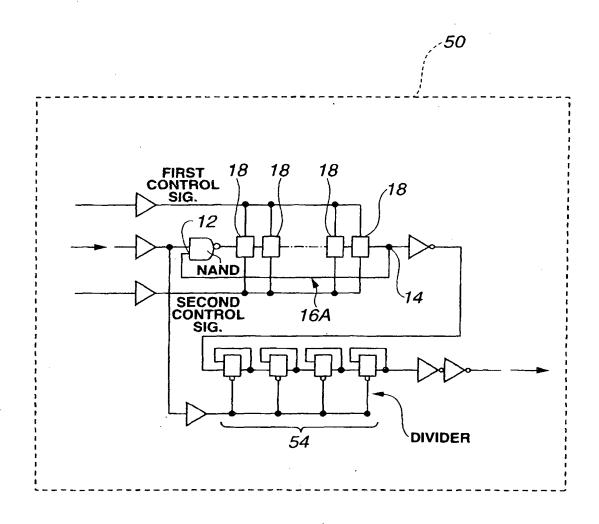


FIG.3

60

| MODEL | Р | N | NORMAL MODE |
|-------|--------|--------|----------------|
| SLOW | 141.10 | 127.80 | 95.73 |
| ТҮР | 102.50 | 90.02 | 77.35 |
| FAST | 75.13 | 66.89 | 62.98 |
| PLNH | 90.18 | 127.30 | 79.44 |
| PHNL | 131.80 | 75.88 | 75.51 |

(nsec)

FIG.4A


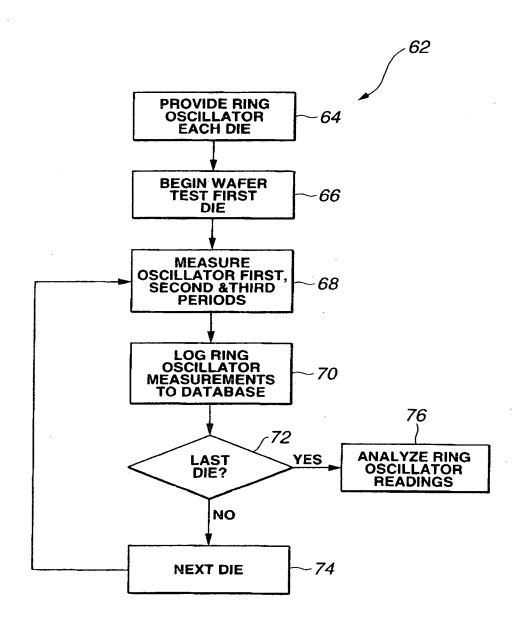


FIG.4B

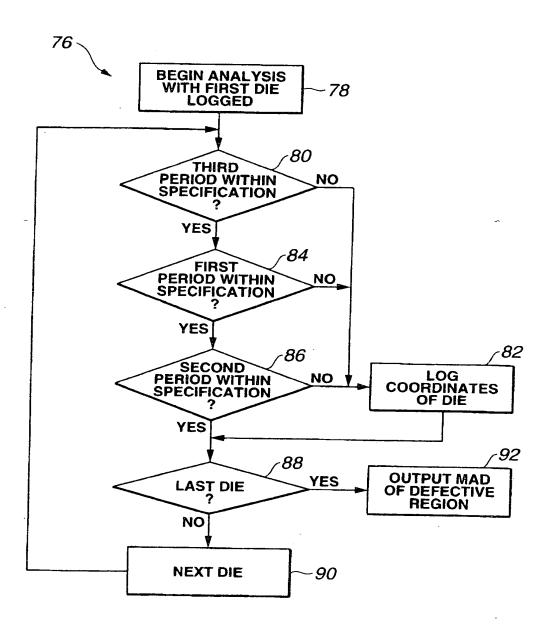

438 TO WAFER UNDER TEST COMMUNICATIONS ADAPTER 434 436 DISPLAY ADAPTER 1/0 ADAPTER 418 RAM 414 USER INTERFACE ADAPTER ROM 416 CPU 410 424 412

FIG.6 PRIOR ART

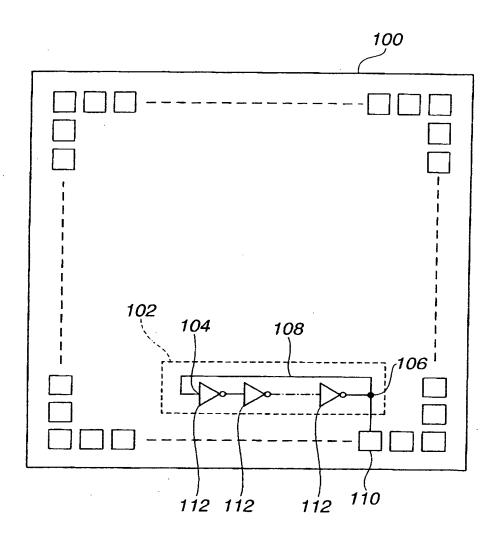


FIG.7
PRIOR ART

